* NOTE:

Meter location must be spotted by LEC personnel prior to installation.

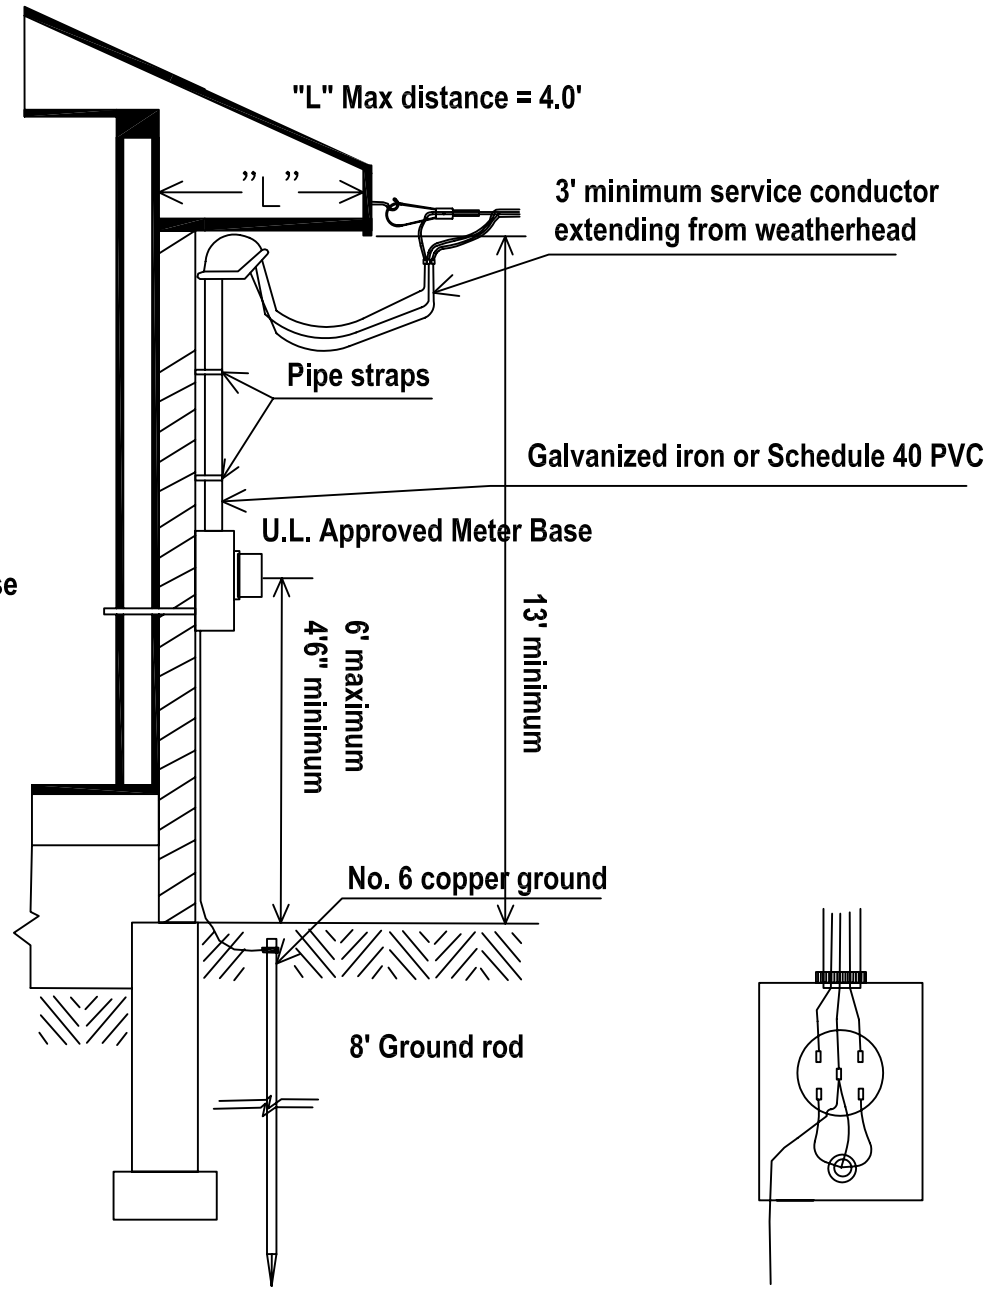

TO BE INSTALLED AND FURNISHED BY CUSTOMER

1. 5/8" X 8' galvanized or copper coated ground rod with U.L. approved clamp.
2. Galvanized iron or schedule 40 PVC conduit from meter base to weatherhead.
   Conduit size: 2" = 200 AMP
   3" = 400 AMP
3. Customer to supply 200 AMP meter base that is U.L. approved.
4. Weatherhead.
5. Minimum of 3' of service entrance conductors extending out of weatherhead.
6. Pipe straps to be securely fastened to house.
7. Number 6 copper ground.

Residential Overhead Service Under Roof Edge

Revised:

Laurens Electric Cooperative
P.O. Box 700
Laurens, SC 29360